### **Technical Specifications**

| Туре               | Desktop folder   |
|--------------------|--|
| Feeding Mechanism  | Suction (Fan motor)  |
| Minimum Paper Size | 182 to 457.2mm   |
| Maximum Paper Size | 120 to 311mm   |
| Paper Quality      | Fine quality, Recycled, Stencil,<br>Art and Coated   |
| Paper Weight       | 52.3 – 157gsm<br>230gsm when A4 sheet is<br>single folded  |
| Folding Mode       | Single fold, Double fold,<br>Irregular accordion fold,<br>Letter fold, Accordion fold,<br>Cross fold & Custom fold |
| Processing Speed   | 260 sheets/minute (15,600 sheets/hour)   |
| Job Memories       | 20   |

| Developed Trans                        | 50   |
|--|--|
| Paper Feed Tray                        | 50mm   |
| Optical Double Feed Detection          | Yes  |
| <b>Automatic Fold Position Setting</b> | Yes  |
| Counter                                | Up & Down  |
| Error Detection                        | Paper empty, Miss-feed,<br>Paper jam, Double feed<br>detection, Paper size error |
| <b>Standard Paper Size Detection</b>   | A3, B4, A4, B5, A5, B6   |
| Interval Function/ Batch Mode          | Yes  |
| Sound Level                            | 74.3dB   |
| Current Consumption                    | With Side Air Kit 175W (1.8-<br>0.7A)<br>Without Side Air Kit 130W<br>(1.3-0.6A) |



Height: 541mm

#### **Duplo International Limited**

Automated Precision House Hamm Moor Lane Addlestone Surrey KT15 2SD

Tel +44(0) 1932 263 900 - Fax +44(0) 1932 263 901 info@duplointernational.com www.duplointernational.com

Duplo is a trade mark of the Duplo Corporation.

Duplo has a policy of continuous improvement and reserves the right to amend the above specification without prior notice

Production rates are based on optimal operating conditions and may vary depending on stock and environmental conditions.





# **DF-1200**

## TABLE-TOP SUCTION FOLDER WITH THE OPTICAL DOUBLE FEED DETECTION

Air suction feeding
Up to 260 sheets per minute
Automatic plate set-up
Low operating sound level
Cross-fold

Letters, Leaflets, Brochures, Menus, Bulletins, Greeting cards, Direct mail pieces, Magazines & Newspaper inserts



The DF-1200 is the only table-top suction folder in the market with **Optical Double Feed Detection. Duplo** has developed the DF-1200 by looking at the major trends in the global print market, in particular the digital colour market at which it is targeted. The suction feed helps to avoid marking and static fuelled mis-feeding notorious on friction fed paper handling systems whilst also allowing a heavier grade of paper to be fed. User-friendliness is key, with both intelligent paper size detection and automatic plate setting working together to ensure the quickest possible set-up and folding accuracy.



#### **Folding Quality and Styles**

The DF-1200 utilises two folding plates and four folding rollers to guide heavier stocks and achieve a superbly flat fold. It is equipped with 6 standard folding styles: Single Fold, Double Fold, Irregular Accordion Fold, Letter Fold, Accordion Fold and Brochure Fold. In addition, the operator can create Custom fold and Cross fold applications that give an enormous level of flexibility.



#### **Productivity**

The DF-1200 can consistently and accurately process up to 260 sheets per minute. Equipped with 5 speed levels, the operator has greater flexibility to reduce the speed for tricky jobs and increase the speed when time is of the essence. Automatic set-up ensures very high productivity and efficiency in terms of savings in cost and time.



#### **Feeding Mechanism**

The DF-1200 is equipped with a top feeding suction-fed system. It is designed to handle all paper types whilst set-up is fully automatic and intuitive. The top feeding system relieves pressure on the fed sheet because there is no weight above it. This means there is no rubbing because the sheet is lifted by air suction rather than dragged through and delivered into the machine. The paper feed tray has a capacity of 625 sheets (50mm).



#### **Flexibility**

The DF-1200 automatically detects the standard paper sizes from A3, B4, A4, B5, A5 and B6 and automatically sets the fold position for each of the 6 built-in fold styles. For non-standard paper size the length can be inserted manually and the fold positions are adjusted accordingly.



#### **Noise Level**

The new DF-1200 is the quietest tabletop air suction folding machine in the market today. It is equipped with a fan not a pump and the fan system is much smaller than conventional ones so it is housed within the machine itself. The fan is also much quieter than a compressor pump, this is particularly noticeable when compared to other suction folders.



Accordion





Gate

Half Accordion








Double Parallel

Letter

Cross-Fold

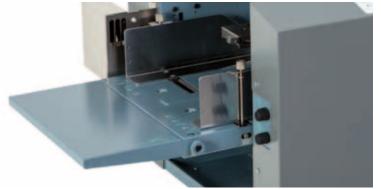





#### **Job Memories**

The DF-1200 has 20 job memories for non-standard folds. The operator can insert the sheet length and fold dimensions through the control panel and can save the jobs which can be recalled for future use. Once an operator enters the folding parameters and presses the test button, all parameters are automatically adjusted.



#### Batch Mode/Interval Function

The benefits of this feature are multifaceted. In terms of productivity alone, it ensures the machine can be run at a continuous speed with a short pause at set intervals, to enable the operator to offload without completely stopping the machine – essential on a long run.



#### **Optical Double Feed Detection**

The DF-1200 is the only table-top air suction folder in the market equipped with Optical Double Feed Detection, ensuring the integrity of the folding process. Optical Double Feed Detection ensures just a single sheet is processed at a time, which is particularly important when folding personalised letters and documents.




#### **Optional Side Air Kit**

The DF-1200 has an Optional Side Air kit for better paper separation and smooth feeding.


#### **Low Space Requirement**

The DF-1200 has a compact footprint making it the ideal solution for small workspaces.

#### **Folding Process**

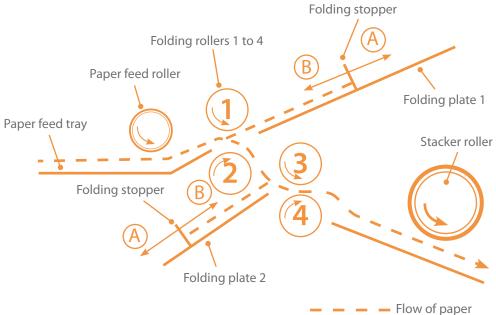



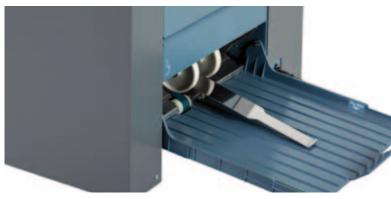

Side air kit Delivery tray